


With easy-to-read scale and large labelling field for easy marking, in fired-on, highly durable white ceramic. With proven DURAN® properties. Complete with blue screw cap (PP, integral lip seal) and pouring ring (PP) for drip-free pouring and clean, safe working. Service temperature level of screw cap and pouring ring: +140 °C.

Typical applications: storage, sample preparation, transport. Autoclaving media.

DURAN® Laboratory Bottle

with DIN thread

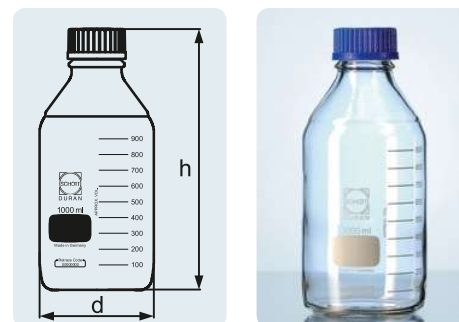

Cat. No.	Capacity (mL)	d (mm)	h (mm)	DIN Thread (GL)	Remark	Pack Unit
without screw cap and pouring ring						
218010802	10	36	50	25	Acceptance within ISO 4796 standard has been requested. With specially shaped glass edge for improved pouring out (so that an additional plastic pouring ring is not required).	10
218011404	25	36	70	25	With specially shaped glass edge for improved pouring out (so that an additional plastic pouring ring is not required).	10
218011704	50	46	87	32		10
218012409	100	56	100	45		10
218012906	150	62	110	45		10
218013602	250	70	138	45		10
218014401	500	86	176	45		10
218015106	750	95	203	45		10
218015406	1 000	101	225	45		10
218016308	2 000	136	260	45		10
218016908	3 500	160	295	45		1
218017304	5 000	182	330	45		1
218018609	10 000	227	410	45		1
218018806	15 000	268	445	45		1
218019108	20 000	288	505	45		1
with screw cap and pouring ring from PP (blue)						
218010851	10	36	54	25	Acceptance within ISO 4796 standard has been requested. With specially shaped glass edge for improved pouring out (so that an additional plastic pouring ring is not required).	10
218011453	25	36	74	25	With specially shaped glass edge for improved pouring out (so that an additional plastic pouring ring is not required).	10
218011753	50	46	91	32		10
218012458	100	56	105	45		10
218012955	150	62	115	45		10
218013651	250	70	143	45		10
218014459	500	86	181	45		10
218015155	750	95	208	45		10
218015455	1 000	101	230	45		10
218016357	2 000	136	265	45		10
218016957	3 500	160	300	45		1
218017353	5 000	182	335	45		1
218018658	10 000	227	415	45		1
218018855	15 000	268	450	45		1
218019157	20 000	288	510	45		1