

Volumetric Glassware: Burettes




GVB-3295/...AS

Burettes, Class AS

- Complies with ISO 385.
- Manufactured from precision-bore tubing (borosilicate glass) for high accuracy.
- Grease-free interchangeable PTFE stopcock with 1.5mm bore.
- Graduations in white enamel for increased visibility with dark solutions.

Brand	Reference	Cap/mL	Std/Pack
Pyrex	GVB-3295/12AS	10 x 0.02	10
Pyrex	GVB-3295/14AS	25 x 0.10	10
Pyrex	GVB-3295/16AS	50 x 0.10	10
Pyrex	GVB-3295/18AS	100 x 0.20	10

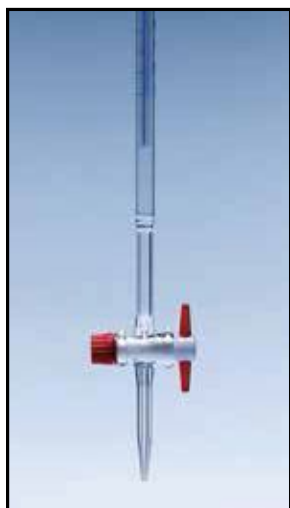

GVB-492093

Burettes, Class AS, Schellbach

- Complies with ISO 385.
- Interchangeable PTFE stopcock.
- Graduation and inscription in blue enamel.
- With funnel top to make filling easier and safer.
- Schellbach burette tube with vertical white stripe and central blue ribbon.
 - Facilitate accurate reading of meniscus.
 - Exact position of the meniscus is clearly defined where the blue ribbon splits into a wide and narrow band.

Brand	Reference	Cap/mL	Std/Pack
Pyrex	GVB-492092	10 x 0.05	10
Pyrex	GVB-492093	25 x 0.10	10
Pyrex	GVB-492094	25 x 0.05	10
Pyrex	GVB-492095	50 x 0.10	10



GVB-3295/...ASWC

Burettes, Class AS, With Certificate

- Complies with ISO 385.
- Manufactured from precision-bore tubing (borosilicate glass) for high accuracy.
- Grease-free interchangeable PTFE stopcock with 1.5mm bore.
- Graduations in white enamel for increased visibility with dark solutions.
- Individually tested and supplied with certificate showing exact volume dispensed at 3 points on the scale.

Brand	Reference	Cap/mL	Std/Pack
Pyrex	GVB-3295/22ASWC	10 x 0.02	10
Pyrex	GVB-3295/24ASWC	25 x 0.10	10
Pyrex	GVB-3295/26ASWC	50 x 0.10	10
Pyrex	GVB-3295/28ASWC	100 x 0.20	10